


FEATURES

- 22 mm vented, copper-clad voice coil
- Outside ring neodymium magnet structure
- Wide surround
- Coated fabric dome
- Low Fs
- Able to crossover below 2 kHz

IMPEDANCE

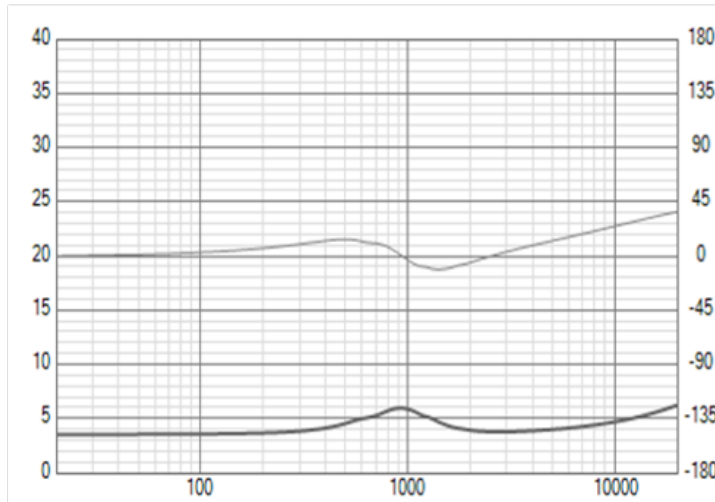

SPECIFICATIONS

| | |
|-----------|---------------------|
| Impedance | 4 Ohm |
| Re | 3.6 Ohm |
| Le | 40 μ H |
| Fs | 870 Hz |
| Qms | 1.4 |
| Qes | 1.69 |
| Qts | 0.77 |
| Mms | 0.27 g |
| Bl | 1.7 |
| Sd | 6.1 cm ² |
| Vas | 7.7 mL |
| Cms | 0.15 mm/N |

FREQUENCY RESPONSE

