




**1TD1-8**  
**1" DOME TWEETER**  
**8 OHM**


**MECHANICAL DRAWING**

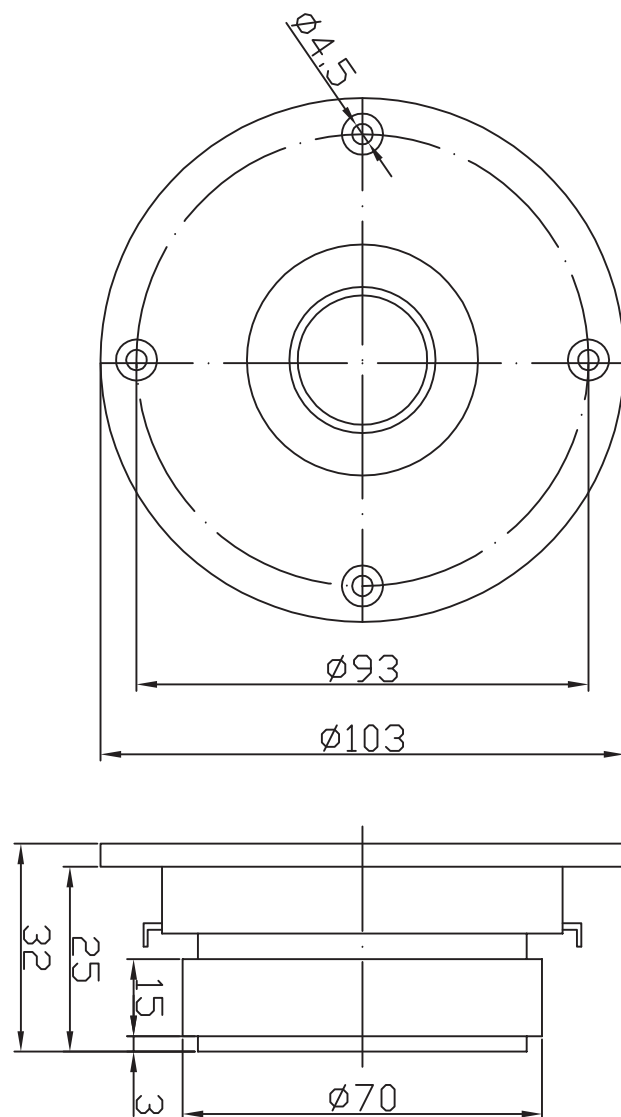

**FEATURES**

- Fabric dome with 1" voice coil
- Round injection-molded faceplate
- Economical replacement for dome tweeters
- Smooth, detailed sound quality
- Great replacement speaker

**IMPEDANCE/PHASE**

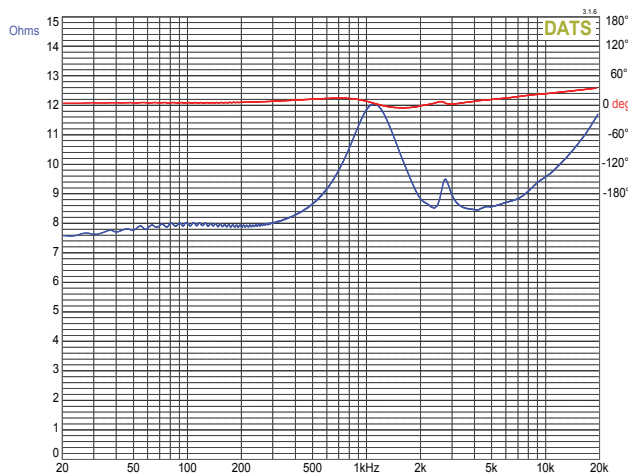

**PARAMETERS**

Impedance	8 ohms
Re	7.4 ohms
Le	0.2 mH
Fs	1,100 Hz
Qms	N/A
Qes	N/A
Qts	N/A
Mms	N/A
Cms	N/A
Sd	N/A
Vd	N/A
BL	N/A
Vas	N/A
Xmax	N/A
VC Diameter	25 mm
SPL	91 dB @ 2.83V/1m
RMS Power Handling	30 watts
Usable Frequency Range (Hz)	2,000 – 20,000 Hz

**FREQUENCY RESPONSE**

