

18W/4532G03

18 cm midwoofer with paper cone (4 Ohm)


Technical Data		
T-S Parameters:		
Resonance frequency (fs)	[Hz]	44
Mechanical Q factor (Qms)		3,61
Electrical Q factor (Qes)		0,36
Total Q factor (Qts)		0,33
Force factor (Bl)	[Tm]	5,7
Mechanical resistance [Rms]	[kg/s]	1,05
Moving mass (Mms)	[g]	13,8
Compliance (Cms)	[mm/N]	0,95
Effective piston area (Sd)	[cm^2]	139
Equivalent volume (Vas)	[dm^3]	25,6
Sensitivity (2,83V/1m)	[dB]	91
Mechanical Data:		
Voice coil diameter	[mm]	32
Voice coil height	[mm]	13,4
Gap height	[mm]	5
Linear excursion	[mm]	+/-4,2
Max mech. excursion	[mm]	+/-8,0
Electrical Data:		
Nominal Impedance (Zn)	[Ohm]	4
DC resistance (Re)	[Ohm]	3,1
Voice coil inductance (Le)	[mH]	0,37
Power Handling:		
100h RMS noise test (IEC 18.4)	[W]	55
Long-term max power (IEC 18.2)	[W]	170



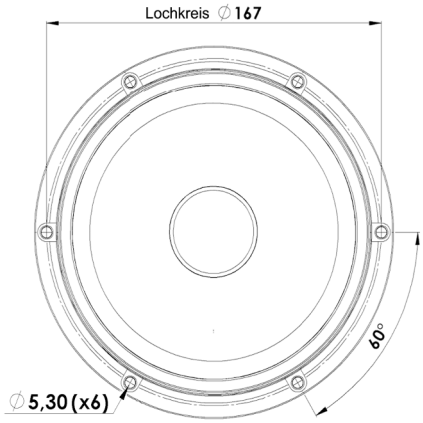

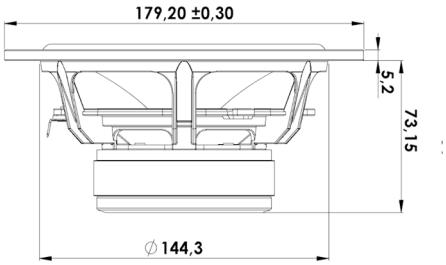

- NRSC paper cone
- Low loss SBR rubber surround
- Magnet system w. Alu ring
- Die cast Alu chassis vented below spider
- Bas-reflex (10-15 ltr) midwoofer (45 Hz – 4 kHz)
- Made in Denmark

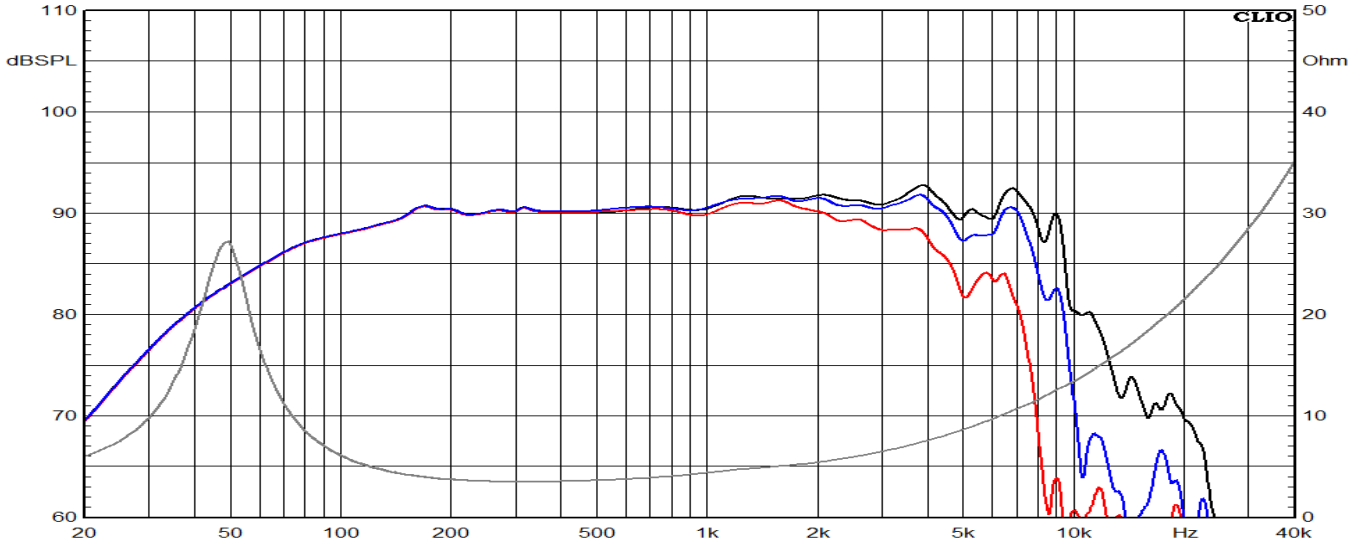

Frequency response 0°/15°/30° | Impedance